



# PRODUCT SPECIFICATION

## RECYCLED GRANITE SUBWAY TILE

### 1.0 SCOPE

This Product Specification covers material information and installation requirements of Recycled Granite Subway Tiles.

### 2.0 PRODUCT DESCRIPTION

#### 2.1 PRODUCT NAME AND BLEND STYLES

##### Product Name

Recycled Granite Subway Tile,  
Recycled Granite Subway Wall Tile,  
Recycled Granite Polished Granite Wall Tile

##### Blend Styles



Bright Angel, Copper Canyon, Dragoon  
Peak, Galaxy, Pine Top, Sedona

#### 2.2 MATERIAL INFORMATION

Composition	Varied granite sourced locally from fabrication remnants. ASTM Standard C615 Standard specification for granite dimension stone.
Length	6" ( $\approx 1/4"$ )
Height	2 $5/8$ " ( $\approx 1/4"$ )
Nominal Thickness	$5/8$ " ( $\approx 1/4"$ )
Weight per Square Foot	11 lbs. ( $\pm 1$ lbs)
Colors	Varied by Blend Style. See Design Catalog.
Structure	4 sided chiseled edge

### 3.0 INSTALLATION REQUIREMENTS

Thin individual stone application shall require no mechanical support or anchorage. The stone can be back buttered to achieve, as close as practical, 100% adhesive contact between stone and backup or applied using a  $3/16$ " notched trowel. Wedge spacers are temporarily required to maintain horizontal level. Installation on interior and exterior vertical surfaces are fully reliant upon the backup and substrate for performance. Adhere to ASTM standards for substrate requirements. Joint spacing of  $3/16$ " ( $\pm 1/16$ "). Decorative stone not for structural applications. Refer to Installation Guide for complete instructions.

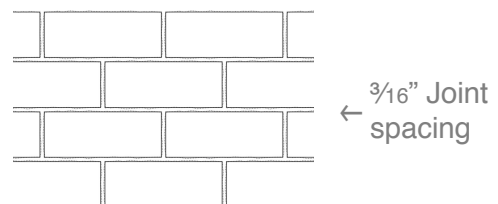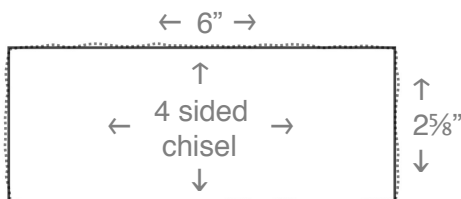

Limited Product Warranty

Lifetime - refer to detailed warranty for restrictions and contingents.